


Geo-Glide U-Point

Ground Energy Systems is proud to introduce the **NARROWEST** geothermal U-Bend on the market – up to 33% smaller than other U-Bends in the industry.

THE PATENT PENDING U-POINT IS:




SMALL ON THE OUTSIDE

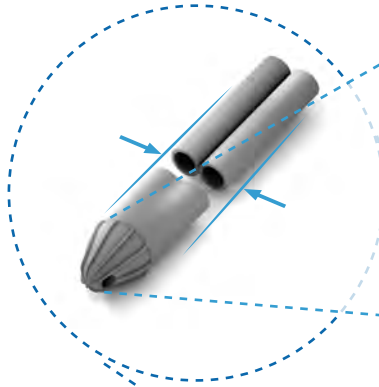

Equivalent to the OD of two pipes side by side.

BIG ON THE INSIDE

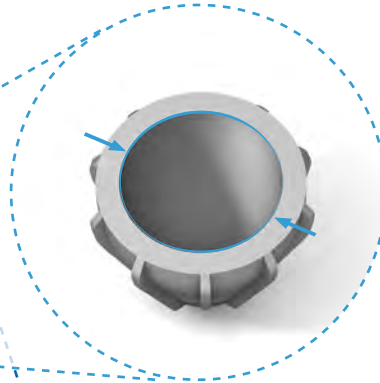


A uniquely designed large flow path with no sharp turns.

PERFECT FOR ANY BOREHOLE



Single U-Points available from 3/4" – 2" IPS and Double U-Points available from 3/4" – 1 1/4" IPS.

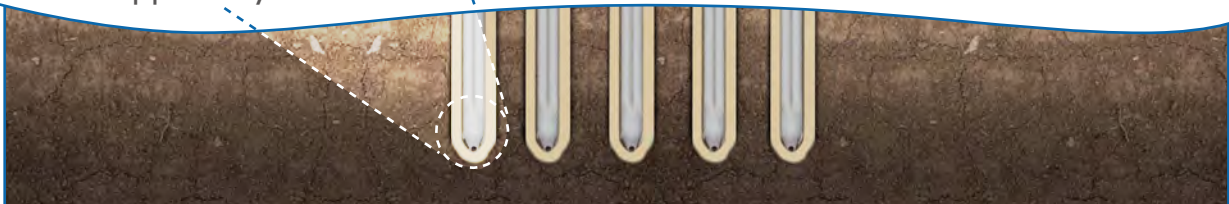


OUTSIDE DIAMETER COMPARISON

Pipe Diameter	2 Pipes Pressed Together	Competing U-Bends	U-POINT	Reduction vs. Competition (in)	Reduction vs. Competition (%)
3/4"	2.100"	2.375" – 3.125"	2.100"	Up to 1.025"	Up to 33%
1"	2.630"	3.120" – 3.750"	2.630"	Up to 1.120"	Up to 30%
1 1/4"	3.320"	3.750" – 4.625"	3.320"	Up to 1.305"	Up to 28%

* 1 1/2" and 2" U-Points are the only available U-Bends of those sizes on the market.

Geo-Glide U-Point

THE U-POINT WILL HELP YOU **CUT COSTS** ON YOUR NEXT JOB.


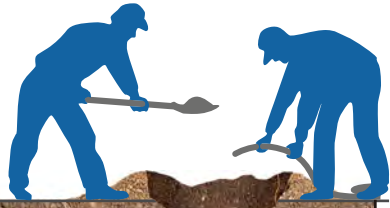


LESS LABOR:

Less material leads to a reduction in the time it takes to mix and fill the bore with grout.

LESS GROUT:

The U-Point is specifically engineered to fit into a smaller hole, reducing the amount of backfill material required.

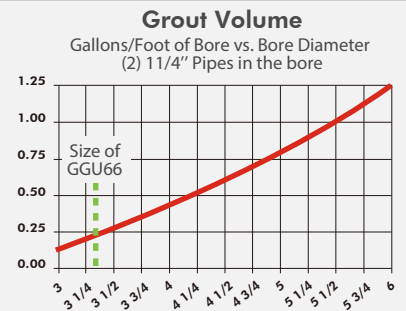

LESS RISK:

Eliminate the risk of debris obstructing a small and restrictive flow area.

FLOW AREA COMPARISON

